



### Flexible, efficient, high performance coding – whatever the environment

The **A5**20i builds on our heritage of delivering highly reliable and versatile continuous ink jet printers – it is there for when and where you need it on your production line, with class-leading availability. Its flexible design allows you to site the user interface and printer separately to suit your working environment.

The **A5**20i is designed for wash down environments using marine grade stainless steel (316). Additional reliability comes from our innovative plenum airflow cooling system. This keeps the printer cool and the electronics sealed (IP66), providing all the protection you need to keep your production line running.

Our unique service free **i-Tech** ink system continues to deliver ultra-low makeup usage, driving down your solvent footprint, reducing costs and operator intervention.

### The **i-Tech** ink system – designed for optimum performance in your application

Domino's specialist, custom and **i-Tech** inks, available worldwide, are designed with optimised code quality, reliability and running costs. *intelligent Technology* is at the heart of the printer ...

**i-Tech** inks that uniquely fully comply to EuPIA listings for food packaging




















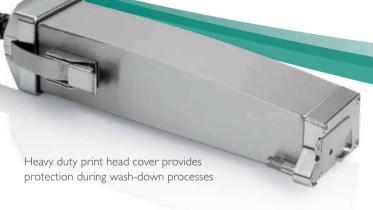

The **A5**20i simply offers real-world consistent coding performance, future proofing all your coding requirements, whether planned for or unforeseen.

#### 1

#### Greener credentials

Domino is committed to sound environmental practices and minimising the consumption of natural resources and energy and the creation of waste. We invest in our supply chain to ensure good social and environmental practice and we are supportive of developments to improve corporate accountability. Wherever practical, our products are RoHS and WEEE compliant.

#### A520i

The A520i, with simple consumable replenishment and intelligent fluid management allows ink replacement to be reduced by up to 90% compared to a standard ink jet printer, while makeup use has been reduced to less than 1ml per hour at 20°C with our most efficient ink, all lessening your solvent footprint. With advanced energy saving software the printer can even automatically shut down when your production line stops.



# Flexible – for seamless integration

We offer a range of variants – with a modular design that allows you to position the interface and printer apart to suit your production line, including an easy to stack option.

#### Consistent availability in your environment

Hot, wet, cold or dry - the engineering excellence in the A520i ink jet printer works even in the harshest of environments.



#### Configured to suit your needs

• The durable 316 stainless steel cabinet with its sealed IP66 electronics enclosure can be mounted to suit your line configuration

#### Convenient


- Just press a single button and walk away. We call it **SureStart**. It's our unique print head with a nozzle sealing and flushing process that guarantees consistent performance
- You can choose to have the **TouchPanel** either mounted directly on the printer cabinet or separately to suit your operator requirements and line layout
- The **QuickStep** User Interface can be accessed via the **TouchPanel** or any Windows® Interface on the production line



## Performance – to exceed your expectations


#### Highest performance, lowest total cost of ownership

The **A5**20i can match the speed of your production line today and in the future with its range of high performance print heads, while reducing your total cost of ownership by minimising the consumbles you need to use. Use the charts below to see what you can achieve:




#### Highest speed

When specified with an XS print head, a line speed of up to 17m/s can be achieved when using a 5 drop font and 5mm wide characters. A 2-line code, 5 drop font can run up to 7.7 m/s



#### Low ink usage

Almost 200 million characters per litre can be achieved



#### Lowest makeup usage

The A520i printer has the lowest measured makeup consumption of any ink jet printer, saving you time and money

## Easy to use — and it's service free...

#### Service free

No maintenance, no fuss - at the heart of the A520i is the **i-Tech** ink system with its revolutionary **i-Tech Module**. The **i-Tech Module** contains the working ink and ink filters and is one of the consumables that are routinely changed to keep the printer running, along with the ink and makeup cartridges. This is all the maintenance the printer requires to keep it up and running. Changing the **i-Tech Module** is a job that anyone can do in less than 10 minutes and would only be done once a year.



The **CleanFill** cartridges can easily be changed while the printer is still operating, and the larger volume makeup cartridges provide extended runtime between changes — with the result that the **A5**20i is online for longer, with fewer interruptions and less waste.

Even our consumables are colour-coded for complete day-to-day convenience.

#### **QuickStep** User Interface – any action is no more than 3 touches away

**QuickStep** is our unique, simplified operator interface that gets the printer in action as quickly as possible. No complex menus or parameters, just enter the job and away you go.





DOMING PinPoint

Domino. Do more.



### **Technical Specification:**

|  | A520i             |
|--|-------------------|
|  |                   |
| Operational Capability                         |                   |
| Max number of unicode characters per line      | 255               |
| Max number of lines Standard                   | 4                 |
| Max number of lines Duo                        | 8                 |
| Max number of lines Pinpoint                   | 3                 |
| Max number of lines XS                         | 4                 |
| Max number of message per message store        | 256               |
| Max number of message stores per printer       | 16                |
| Max line speed (single line 5 drop)            | 510m/min          |
| Interfaces                                     |                   |
| TouchPanel remote touch screen (IP65)          | Optional          |
| Ethernet (web server and email alert function) | Standard          |
| USB  | Standard          |
| RS232  | Optional          |
| Domino Protocols                               | Codenet/ Intercom |
| Industry Protocols                             | ZPL (limited)     |
| 4 stage 24v beacon (Port is standard)          | Optional          |
| 4 stage voltage free contacts                  | Standard          |
| Programmable i/o (8 Inputs and 8 outputs)      | Optional          |
| Product detect                                 | Standard          |
| Shaft encoder                                  | Standard          |

Graphical User Interface
QuickStep, full colour interface. Intuitive navigation via large, easy to read buttons and icons;WYSIWYG print preview.

| Multi-language support.  |  |
|--|--|
| Environment Weight IP rating electronics enclosure IP rating inks system enclosure Operating temp Humidity Power requirement Power consumption   | 33kgs<br>1P66<br>1P55<br>5-45°C (40-112°F)<br>10-90%RH<br>100-240V:4A 50-60Hz<br>94 Watts  |
| Compliance CE TUV RoHS Sony Green Partner Eupia compliant inks Heavy metal free inks Halogen free inks   | Standard<br>Standard<br>Standard<br>Standard<br>Standard<br>Available<br>Available   |
| SureStart Print Head Standard and Duo Conduit length Nozzle size Pinpoint Conduit length Nozzle size XS Conduit length Nozzle size XS Conduit length Nozzle size Conduit bend radius Heater Heavy Duty print head (IP65) Positive air pump Air Dryer | 3m standard or 6m optional 60µ or 75µ  3m standard or 4m optional 40µ  3m standard or 6m optional 60µ 65mm Standard Optional Optional Optional |
| Ink System i-Tech ink system CleanFill ink cartridge CleanFill MU cartridge i-Tech Module replacement Routine servicing Solvent Reduction (Peltier) * operator task  | Standard<br>825ml*<br>1200ml*<br>Ink dependent*<br>None<br>Standard  |

Not to scale. For illustrative purposes only.

